




API ADAPTERS

PARVEEN API Threaded Adapters have an API pin thread down and a quick box connection up. These adapters are used for lower working pressure. Any combination of end connections are available on request.

Engineering Data for Crossover Adapter				
SERVICE	I.D. (INCH)	W.P. (PSI)	BOTTOM CONN.	PART NO.
STD	2.067	5,000	2-11.5 V Line Pipe	134-025011
H2S	2.067	5,000	2-11.5 V Line Pipe	134-025010
STD	1.995	5,000	2-3/8 EU 8 rd	134-015021
H2S	1.995	5,000	2-3/8 EU 8 rd	134-015020
STD	2.441	5,000	2-7/8 EU 8 rd	134-035031
H2S	2.441	5,000	2-7/8 EU 8 rd	134-035030
STD	2.500	5,000	3-1/2 EU 8 rd	134-045041
H2S	2.500	5,000	3-1/2 EU 8 rd	134-045040
STD	2.992	5,000	3-1/2 EU 8 rd	134-055041
H2S	2.992	5,000	3-1/2 EU 8 rd	134-055040
STD	3.476	5,000	4 EU 8 rd	134-065051
H2S	3.476	5,000	4 EU 8 rd	134-065050
H2S	3.958	5,000	4-1/2 EU 8 rd	134-075060
STD	3.598	5,000	4-1/2 EU 8 rd	134-075061
H2S	4.000	5,000	4-1/2-8 rd long casing	134-085070
STD	4.000	5,000	4-1/2-8 rd long casing	134-085071
H2S	4.000	5,000	5-1/2-8 rd long casing	134-085080
STD	4.890	5,000	5-1/2-8 rd long casing	134-105081
STD	5.000	3,000	7-8 rd long casing	134-113091
STD	5.000	5,000	7-5/8-8 rd long casing	134-115101
H2S	4.670	5,000	5-1/2-8 rd long casing	134-095080
H2S	5.000	3,000	7-8 rd long casing	134-113090
H2S	5.000	5,000	7-5/8-8 rd long casing	134-115100
STD	5.000	5,000	9-5/8-8 rd long casing	134-115111
H2S	5.000	5,000	9-5/8-8 rd long casing	134-115110
STD	6.375	5,000	9-5/8-8 rd long casing	134-135111
H2S	6.375	5,000	9-5/8-8 rd long casing	134-135110
STD	6.090	3,000	7-8 rd long casing	134-123091
H2S	6.090	3,000	7-8 rd long casing	134-123090

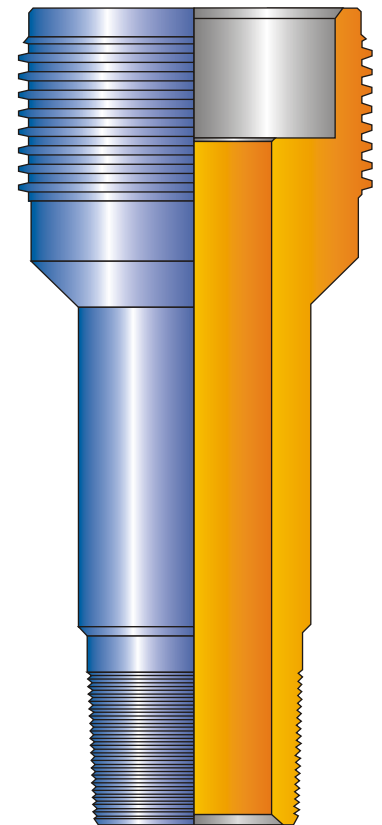

**TUBING PIN
X THREADED HALF**

! Top Conn : To Select From Quick Union identification Chart Page No. 39 & 40.