





BLANKING CAP & PLUG

PARVEEN Blanking Cap and Blanking Plugs are used for installing gauge and / or Bleed Off Valve. They are available for use on all Quick Unions, and are equipped with NPT ports.



BLANKING PLUG




BLANKING CAP

PUMP IN SUB

The Pump-In Sub is placed between wireline BOP and the Wellhead. It is basically used to pump the fluid in well when wireline BOP is closed. Pump-In Sub can also be used for injection of inhibitors and for collecting samples. It has top and bottom with Quick Union Connections and side outlet with Wing Union Connection.

| Engineering Data for Pump-In Sub | | |
|---|------------------|----------------|
| ID | W.P (PSI) | SERVICE |
| 2-1/2 | 5,000 | STD |
| 2-1/2 | 5,000 | H2S |
| 2-1/2 | 10,000 | STD. |
| 2-1/2 | 10,000 | H2S |
| 3 | 10,000 | STD |
| 3 | 10,000 | H2S |
| 4 | 10,000 | H2S |
| 5.12 | 10,000 | H2S |
| 6-3/8 | 10,000 | H2S |

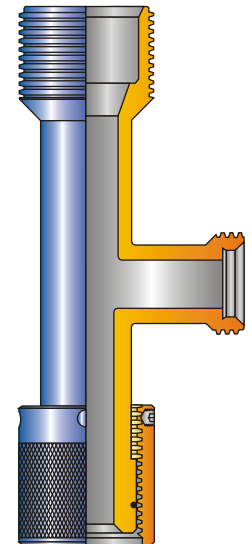

*PUMP IN SUB
W/WECO
UNION ON SIDE*