




'BB' BLIND BOX

Parveen Blind Boxes are used when heavy downward jarring is required to dislodge a fish or push something down the hole. Bottom surface of Blind Box is flat and hardened to reduce wear and damage.

Engineering Data for Blind Box			
O.D. RANGE (IN) *	F/N O.D. (IN)	THREAD CONN. PIN (IN.-TPI)	PART NO
1.187 - 1.250	1.187	15/16 - 10 UN	221211
1.625 - 1.375	1.375	15/16 - 10 UN	222221
2.625 - 2.750	1.750	1.1/16 - 10 UN	222732
3.500 - 4.625	2.312	1.9/16 - 10 UN	224646
5.250 - 5.750	2.312	1.9/16 - 10 UN	225746

* Blind Boxes are available in MM. Increments Within The Specified O.D. Ranges. When Ordering, Specify Required O.D. In MM. (Inches x 25.4 = MM)

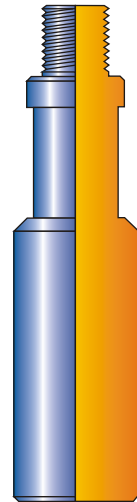


**BLIND
BOX**

'TL' TUBING END LOCATOR

PARVEEN Tubing End Locators are used to locate end of tubing during completions. With its spring loaded finger, it can be run in various sizes of tubing ranging from 2.3/8" till 4.1/2".

Engineering Data for Tubing End Locator					
SIZE (IN)	MAX O.D. (IN)*	F/N O.D. (IN)	TOP CONN. PIN (IN.-TPI)	BOTTOM CONN. PIN (IN. - TPI)	PART NO.
2 - 2.1/2	1.750	1.375	15/16 - 10 UN	1 - 11.1/2 NPT	421721
3	2.500	1.375	15/16 - 10 UN	1 - 11.1/2 NPT	422521
4	3.750	2.312	1.9/16 - 10 UN	1 - 11.1/2 NPT	423746

- * O.D. With Finger Sheared
- Other Sizes available on request.

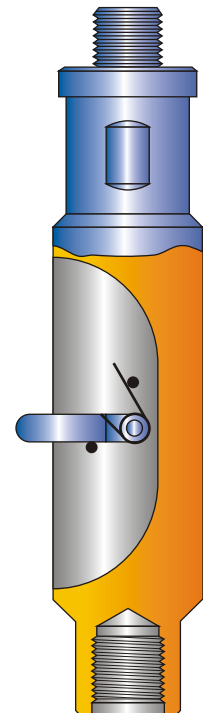

**TUBING END
LOCATOR**