




SUCKER ROD COUPLING

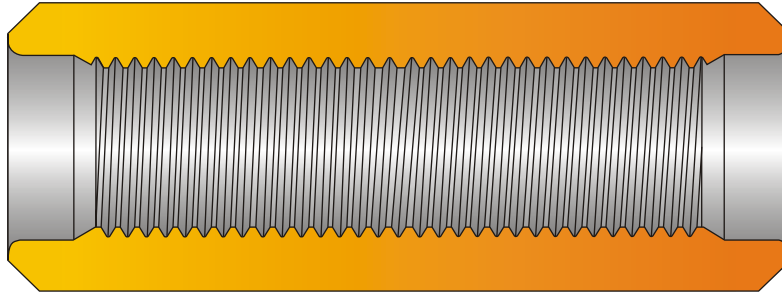

Sub Coupling

Sucker Rod Coupling :

PARVEEN offers 'T' and "SM" grades of Sucker Rod Coupling. Both the grades are manufactured with high grade steels (AISI 8630). The threads of both the grades of coupling are coating for anti-galling properties. Dimension, Tolerance and manufacturing inspection of these couplings conform or exceed the requirement of API-11B latest Edition.

Grade SM. CO-HARD Sucker Rod Coupling :

These couplings are made of 8630 alloy steel and offer excellent resistance to H₂S. The Base metal is prepared to a NO.:1 finish per NACE before spany.

Sub Couplings:

PARVEEN Sub Couplings are used to connect different sizes of Sucker Rod or to connect the Polish Rod to Sucker Rod string. All threads are as per API-11B Polish Rods.

These are available in 'T' and "SM" grades and with recessed ends and double box.