



## PIPELINE GATEVALVE

Parveen Pipe Line Gate Valves are suitably used for Gas, Water, Steam and other chemical duties for prolonged period. The valve has a wedge shaped gate which wedges between the seats to close the valve tightly.

### GENERAL FEATURES:


- Stem threads are away from the line fluid and hence easy to lubricate.
- The yoke sleeve and hand wheel assembly is so arranged in the bonnet, that removal of hand wheel from the yoke sleeve would not cause the wedged gate to fall down.
- Designed to API-600 / API-6D standards.
- Back seating features facilitate re-packing of the stuffing box on line with the valve in fully open position
- Swinging eye bolt facilitates easy access to the stuffing box
- Replaceable screwed seat ring.
- Stellite wedge & seat ring can also be offered on special request.



Size	2		2.1/2		3			4			6		
Class	600	900/1500	600	900/1500	600	900	1500	600	900	1500	600	900	1500
A	11.5	14.5	13	16.5	14	15	18.5	17	18	21.5	22	24	27.75
C	18	18	22	23	26	26	26	30	31	31	42	44	49
W	13	13	13	13	13	13	13	13	21	21	21	21	29

SI No.	8			10			12			14		
Class	600	900	1500	600	900	1500	600	900	1500	600	900	1500
A	26	29	32.75	31	33	39	33	38	44.5	35	40.5	49.5
C	49.25	52	54.49	62	64.25	67	64.17	70.75	71.73	71.77	74.88	77
W	21.65	29.53	29.53	29.53	29.53	33.46	29.53	33.46	33.46	33.46	33.46	37.4

SI No.	16			18		20		24	
Class	600	900	1500	600	900	600	900	600	900
A	39	44.5	54.5	43	48	47	52..	55	61
C	79.5	82.52	85.63	85.2	86.89	93.7	98.4	109.69	118.27
W	33.46	37.40	37.40	37.4	37.4	37.4	37.4	37.4	37.4

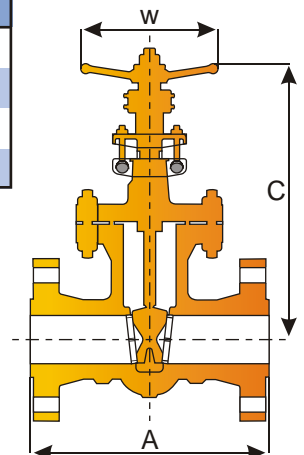

NOTE: 1. Other size and classes pertaining to API standard are also available.  
 2. Face to face distance shown only for Raised face type.  
 3. All above dimensions shown are in inches.