



## BALL VALVE


PARVEEN manufactures simple construction full-bore, non lubricated type, three piece, forged concept Ball Valve technology. Soft seat mounted on the ball guarantee that the static spherical seat rings in the body are perfectly tight.

### Other special features Include

- The operating torque is low whatever the line pressure due to the limited travel of the spherical flanges inside the body.
- There is no friction of the soft seat on the seal rings during operation and the packing wear is practically nil.
- With the valve open, the seals are' protected and relaxed in the body cavity.
- Double sealing upstream and down stream assured in each direction by a single seat.
- The body can be dismantled even in the case of valves welded to the pipeline.

These are available from 2" to 4" sizes; Welded, Flanged or Threaded ends type. Pressure ratings up to 3000 psi W.P. for normal or H<sub>2</sub>S Service.

<b>Part No. &amp; Weight</b>				
<b>Full Port</b>		<b>2"</b>	<b>3"</b>	<b>4"</b>
Flanged End	Part No.	560-2015x-00	560-3015x-00	560-3015x-00
	Wt (lbs)	104	155	266
Screwed End	Part No.	560-2015x-02	560-3015x-02	560-4015x-03
	Wt (lbs)	44	71	160
Weld End	Part No.	560-2015x-03	560-3015x-03	560-4015x-03
	Wt (lbs)	44	71	160

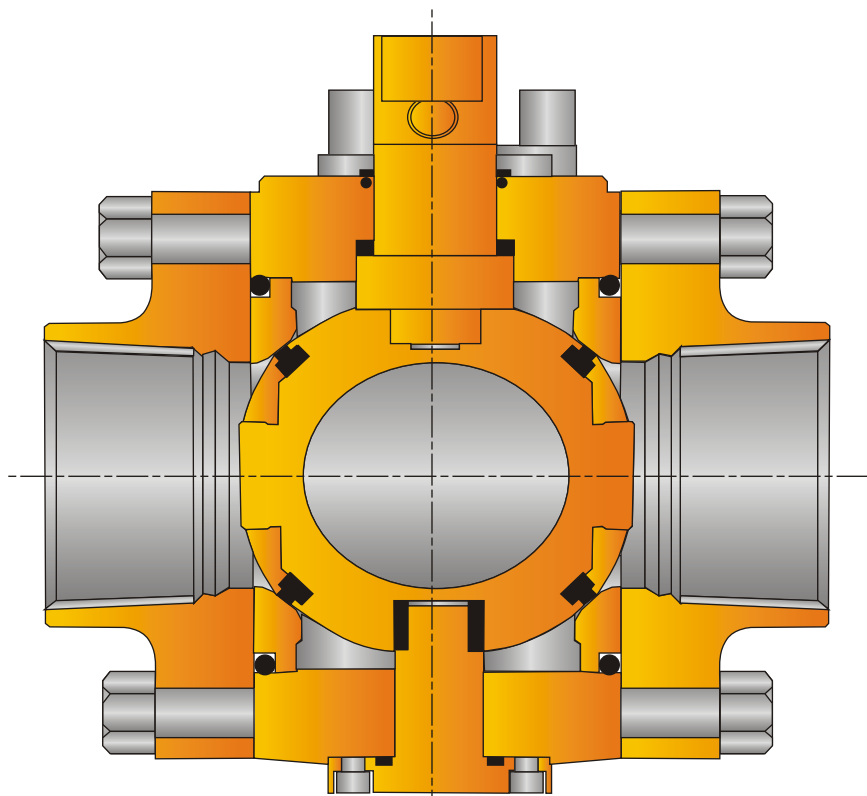

**Ball Valve**