



PUP JOINTS

API TUBING PUP JOINTS

PARVEEN offers seamless API Pup Joints, manufactured to API spec. 5CT using prime API Monogrammed Seamless Oil country Tubing. Outside diameters, lengths & grades are available:

- a. Diameters - 1.05" to 4 1/2"
- b. Weights - As per API - 5CT.
- c. Lengths - 2, 3, 4, 6, 8, 10 & 12 ft Standard.
- d. Grades - H-40, J-55, N-80, L-80, C-90, T-95, P-110.
- e. Connections - EUE, NUE, INTEGRAL JOINT TUBING, PREMIUM THREADS.

NOTE: Upset end forged / machined can be provided. Even higher lengths can be given to suit customer requirements. Markings follow API 5CT requirement. Premium connections such as VAM, HYDRIL, NKK... are sub-contracted to authorised contractors.

API CASING PUP JOINTS

Any length, grade and weight is available on request.

- a. Diameters - 4 1/2" to 9 5/8"
- b. Weights - As Per API-5CT.
- c. Lengths - 2, 3, 4, 6, 8, 10 & 12 ft Standard.
- d. Grades - J-55, K55, N-80, L-80, C-90, C-95, T-95, P-110.
- e. Connections - STC, LTC, BTC & EXTREME LINE, PREMIUM.

NOTE: Premium connections are sub-contracted to authorised contractors.


COUPLINGS

Produced from prime API Monogrammed Seamless tubing or casing in API grade. Couplings can be Regular, Special Clearance, Combination, Reducing and Special Bevel Couplings. Couplings are phosphated to avoid galling. Seal Ring and Uni-flow Coupling can also be provided upon request.

TUBING

- a. Size : Tubing - 1.05" to 4 1/2"
Casing - 4 1/2" to 20"
- b. Weights : - All weights can be catered for.
- c. Grade : Tubing - H-40, J-55, N-80, L-80, C-90, T-95, P-110.
Casing - H-40, J-55, N-80, M-65, C-90, C-95, T-95, L-80, P-110, Q-125
- d. Connections : Tubing - EUE, NUE.
Casing - STC, LTC, BUTTRESS, EXTREME LINE, PREMIUM.

NOTE: Premium connections are sub-contracted to authorised contractors.

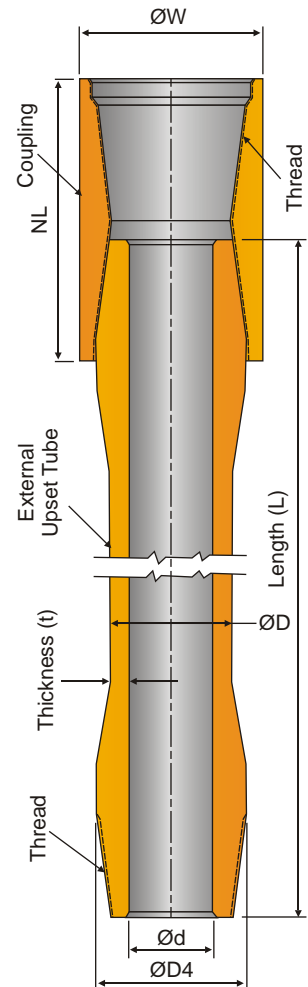

Pup Joint Assembly