




'PX' RUNNING TOOL

PARVEEN PX Running Tool is to enable X Lock to run selectively in the profile required.




**PX
RUNNING
TOOL**

Engineering Data for PX Running Tool				
ACTUAL O.D.(IN)	TO SUIT NIPPLE BORE (IN)	FISH NECK O.D. (IN)	CONNECTIONS PIN X BOX	PART NO.
1.72	1.875	1.375	15/16-10 UN	174-187
2.171	2.313	1.75	15/16-10 UN	174-231
2.687	2.75	2.313	1-1/16-10 UN	174-275
2.843	2.875	2.313	1-1/16-10 UN	174-288
3.25	3.313	2.313	1-1/16-10 UN	174-331
3.75	3.813	2.313	1-1/16-10 UN	174-381
4.50	4.562	3.125	1-1/16-10 UN	174-456

'B' Shifting Tool

'B' Shifting Tool manufactured by PARVEEN is used to open or close Sliding Side Door.

Engineering Data for Shifting Tool				
SSD I.D. (In)	O.D. (Keys Retracted)(In)	Fish Neck O.D. (In)	Connections Pin x Pin	Part No.
1.375	1.35	1.00	5/8-11 UN	175-137
1.500	1.49	1.187	15/16-10 UN	175-150
1.625	1.62	1.187	15/16-10 UN	175-162
1.710	1.69	1.187	15/16-10 UN	175-171
1.781	1.75	1.375	15/16-10 UN	175-178
1.875	1.84	1.375	15/16-10 UN	175-188
2.125	1.97	1.375	15/16-10 UN	175-212
2.188	2.17	1.75	15/16-10 UN	175-218
2.313	2.16	1.75	15/16-10 UN	175-231
2.562	2.53	1.75	15/16-10 UN	175-256
2.750	2.73	2.313	1-1/16-10 UN	175-275
2.813	2.72	2.313	1-1/16-10 UN	175-281
3.125	3.06	1.750	15/16-10 UN	175-312
3.313	3.25	2.313	1-1/16-10 UN	175-3313
3.437	3.38	2.313	1-1/16-10 UN	175-343
3.688	3.66	3.125	1-1/16-10 UN	175-368

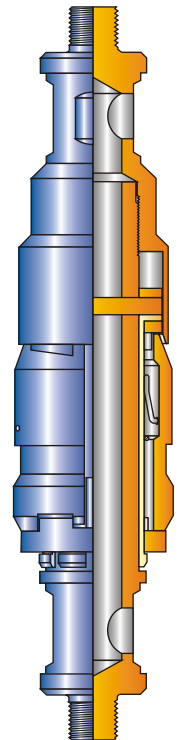

**B
SHIFTING
TOOL**