




DRILL PIPE PUP JOINTS

DRILL PIPE PUP JOINTS

PARVEEN's D.P. P. J. is important drill stem component for special drilling or testing operations. This short drill pipe section is used to locate the top box of the drill string at a specified distance from the rig floor.

PARVEEN's D.P. P. J. is manufactured either from round bar or by machining heavy wall tubing from AISI-4145 H Material.

DRILL PIPE NOMINAL SIZE A"	I.D."	TOOL JOINT O.D C"	CONN. SIZE & TYPE	ELEVATOR UPSET DIA D"	TONG SPACE LENGTHS		MECHANICAL PROPERTIES				AVAILABLE LENGTHS G'	APPX. WT. (LB)	
					BOX E"	PIN F"	TUBE		TOOL JOINT				
							TENSILE YIELD (LB)	TOR-SIONAL YIELD (FT-LB)	TENSILE YIELD (LB)	TOR-SIONAL YIELD (FT-LB)			
3.1/2	2.3/8	4.3/4	N.C.38 (3 1/2 I.F.)	3.7/8	9.1/2	7	571,000	35,080	675,000	17580	5	142	
		5								21600		10	226
												15	310
												20	394
3.1/2	2.11/16	4.3/4	N.C.38 (3 1/2 I.F.)	3.7/8	9.1/2	7	434,330	29,030	538,400	16,000	5	131	
		5										10	198
												15	265
												20	332
4	2.13/16	5.1/4	N.C.40 (4 F.H.)	4.3/16	10	7	698,900	50,200	652,300	21,550	5	178	
		5.1/2										10	286
												15	394
												20	502
4	3.1/4	5.3/4	N.C.46 (4 I.F.)	4.1/2	10	7	469,800	37,480	826,100	30,450	5	168	
		6										10	241
												15	313
												20	386
4.1/2	3.1/4	6	N.C.46 (4 I.F.)	4.11/16	10	7	836,950	68,850	826,100	30,450	5	219	
		6.1/4										10	348
												15	477
												20	607
4.1/2	3.1/2	6.1/8	N.C.50 (4.1/2 I.F.)	5	10	7	691,150	59,970	1017700	34,860	5	240	
		6.1/4										10	311
		6.3/8										15	417
												20	524
4.1/2	3.3/4	6.1/8	N.C.50 (4.1/2 I.F.)	5	10	7	534,550	48,970	861,100	34,200	5	180	
		6.1/4										10	263
		6.3/8										15	345
												20	428
5	3.1/2	6.3/8	N.C.50 (4.1/2 I.F.)	5.1/8	10	7	1101,500	98,600	1017700	40,980	5	253	
		6.1/2										10	423
												15	593
												20	763
5	3.3/4	6.3/8	N.C.50 (4.1/2 I.F.)	5.1/8	10	7	944,950	88,700	861,100	34,200	5	228	
		6.1/2										10	374
												15	520
												20	655

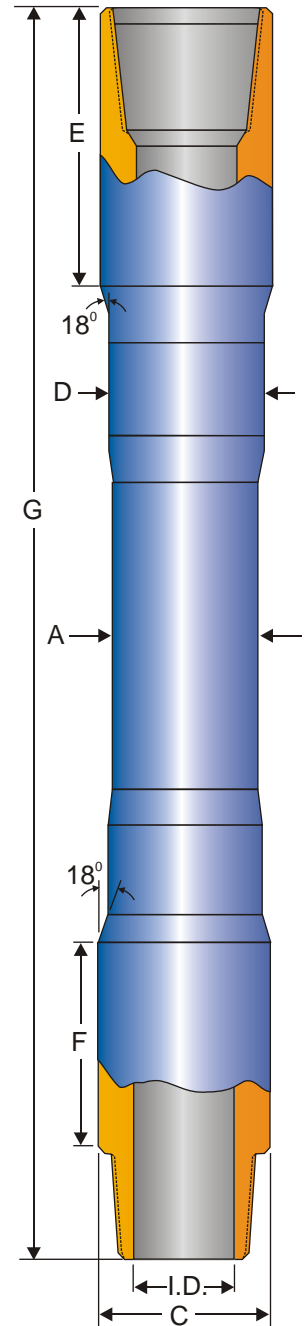

Ordering Information:

To order or request quotations on PARVEEN Pup Joints, please specify :-

- Nominal size. / Bore dia. / Tool joint O.D.
- Size and type of connections (Example: 4 1/2" I.F. Box up X 4 1/2" I.F. pin down, etc.)
- Overall length, shoulder-to-shoulder / 18° taper or square shoulder / Pressed or cast steel thread protectors

Note: Stress relief groove as per API-7 can also be provided upon request.